


オプション

潤滑装置QZ

QZ取付け後のLMブロック寸法(L寸法)

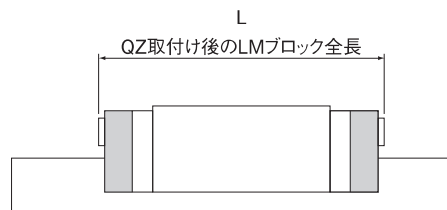

単位:mm

呼び形番	L									
	QZUU	QZSS	QZDD	QZZZ	QZKK	QZSSH	QZDDH	QZZZH	QZKKH	
SHS	15C/V/R	84.4	84.4	89.8	86.8	92.2	100	105.4	101.2	106.6
	15LC/LV	99.4	99.4	104.8	101.8	107.2	115	120.4	116.2	121.6
	20C/V	99	99	105.4	103	109.4	115.4	121.8	117.8	124.2
	20LC/LV	118	118	124.4	122	128.4	134.4	140.8	136.8	143.2
	25C/V/R	114.4	114.4	121.6	120.4	127.6	132	139.2	134.4	141.6
	25LC/LV/LR	131.4	131.4	138.6	137.4	144.6	149	156.2	151.4	158.6
	30C/V/R	127.4	127.4	136	133.8	142.4	149.4	158	151.8	160.4
	30LC/LV/LR	152.4	152.4	161	158.8	167.4	174.4	183	176.8	185.4
	35C/V/R	145	145	154.8	152.4	162.2	168	177.8	170.4	180.2
	35LC/LV/LR	175	175	184.8	182.4	192.2	198	207.8	200.4	210.2
	45C/V/R	173	173	182.8	181.2	191	199	208.8	202.2	212
	45LC/LV/LR	207	207	216.8	215.2	225	233	242.8	236.2	246
	55C/V/R	205.4	205.4	216.6	214.2	225.4	232	243.2	235.2	246.4
	55LC/LV/LR	247.4	247.4	258.6	256.2	267.4	274	285.2	277.2	288.4
65C/V	256.2	256.2	268.6	266.2	278.6	288	300.4	291.2	303.6	
65LC/LV	307.2	307.2	319.6	317.2	329.6	339	351.4	342.2	354.6	
SSR	15XV/XSB	59.3	59.3	65.1	62.7	68.5	75.5	81.3	76.7	82.5
	15XW/XTB	75.9	75.9	81.7	79.3	85.1	92.1	97.9	93.3	99.1
	20XV/XSB	66.2	66.2	73.1	72.1	79	83.7	90.6	86.1	93
	20XW/XTB	85	85	91.9	90.9	97.8	102.5	109.4	104.9	111.8
	25XV/XSB	82.6	82.6	90	88.4	95.8	100	107.4	102.4	109.8
	25XW/XTB	105.6	105.6	113	111.4	118.8	123	130.4	125.4	132.8
	30XV/XSB	89.4	89.4	97.5	95.1	103.2	110.7	118.8	113.1	121.2
	30XW/XTB	119.7	119.7	127.8	125.4	133.5	141	149.1	143.4	151.5
	35XV/XSB	100.9	100.9	109.9	107.9	116.9	123.5	132.5	125.9	134.9
	35XW/XTB	134.3	134.3	143.3	141.3	150.3	156.9	165.9	159.3	168.3
SHW	12CAM/CRM	47	47	—	—	—	58	—	—	—
	12HRM	60.4	60.4	—	—	—	71.4	—	—	—
	14CAM/CRM	55.5	55.5	—	—	—	70.7	—	—	—
	17CAM/CRM	63	63	66	65.4	68.4	78.2	81.2	79.4	82.4
	21CA/CR	75	75	80	78.6	83.6	91.6	96.6	93.2	98.2
	27CA/CR	92.8	92.8	98.6	97.2	103	109.4	115.2	111.8	117.6
	35CA/CR	127	127	134.4	132	139.4	149	156.4	151.4	158.8
50CA/CR	161	161	169.2	167.4	175.6	186	194.2	188.4	196.6	

注) 潤滑装置QZ付きの場合、グリースニップルは付きません。QZ付き仕様でグリースニップル付きを希望される場合は、THKにお問い合わせください。

LMガイド(オプション)

単位:mm

呼び形番	L										
	QZUU	QZSS	QZDD	QZZZ	QZKK	QZSSH	QZDDH	QZZZH	QZKKH		
SRS	7S	29	29	—	—	—	—	—	—	—	
	7M	33.4	33.4	—	—	—	—	—	—	—	
	7N	41	41	—	—	—	—	—	—	—	
	7WS	32.5	32.5	—	—	—	—	—	—	—	
	7WM	41	41	—	—	—	—	—	—	—	
	7WN	50.9	50.9	—	—	—	—	—	—	—	
	9XS	31.5	31.5	—	—	—	—	43.1	—	—	
	9XM	40.8	40.8	—	—	—	—	52.4	—	—	
	9XN	50.8	50.8	—	—	—	—	62.4	—	—	
	9WS	36.5	36.5	—	—	—	—	48.1	—	—	
	9WM	49	49	—	—	—	—	60.6	—	—	
	9WN	60.7	60.7	—	—	—	—	72.3	—	—	
	12S	35	35	—	—	—	—	46.6	—	—	
	12M	44.4	44.4	—	—	—	—	56	—	—	
	12N	57.1	57.1	—	—	—	—	69.1	—	—	
	12WS	40.5	40.5	—	—	—	—	52.1	—	—	
	12WM	54.5	54.5	—	—	—	—	66.1	—	—	
	12WN	69.5	69.5	—	—	—	—	81.1	—	—	
	SCR	15S	84.4	84.4	89.8	86.8	92.2	100.4	105.4	101.4	106.9
		20S	99	99	105.4	103	109.4	115.5	122	118	124.5
20		118	118	124.4	122	128.4	134.5	141	137	143.5	
25		131.4	131.4	138.6	137.4	144.6	149	156.2	151.4	158.6	
30		152.4	152.4	161	158.8	167.4	174.4	183	176.8	185.4	
35		175	175	184.8	182.4	192.2	198	207.8	200.4	210.2	
45		207	207	216.8	215.2	225	233	242.8	236.2	246	
65		307.2	307.2	319.6	317.2	329.6	339	351.4	342.2	354.6	

注) 潤滑装置QZ付きの場合、グリースニップルは付きません。QZ付き仕様でグリースニップル付きを希望される場合は、THKにお問い合わせください。