
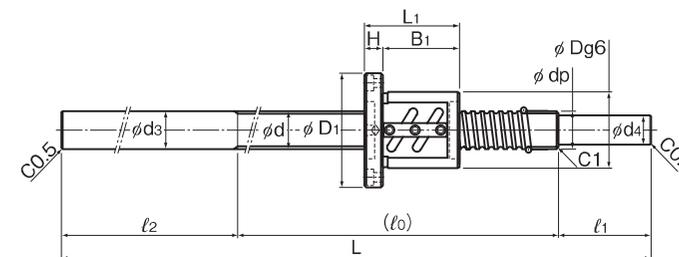


# BNF形(軸端末未加工品) 無予圧タイプ

DN値	70000
-----	-------



単位:mm

呼び形番	ボールねじ仕様							ナット寸法				ねじ軸寸法										ナット質量 kg	軸質量 kg/m	許容回転数 min <sup>-1</sup>			
	ねじ軸外径 d	リード Ph	ボール中心径 dp	谷径 dc	負荷回路数 列×巻	基本定格荷重 Ca kN    Coa kN		外径 D	フランジ径 D <sub>1</sub>	全長 L <sub>1</sub>	H	B <sub>1</sub>	PCD	d <sub>1</sub>	d <sub>e</sub>	h	給脂穴 A	軸端末未加工記号	全長 L	l <sub>0</sub>	l <sub>1</sub>				l <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
BNF 2510A-2.5	25	10	26.3	21.4	1×2.5	15.8	33	58	85	70	18	52	71	6.6	11	6.5	M6	A	620	400	60	160	25	20.3	1.43	2.68	2660
																			820	600							
																			1020	800							
																			1220	1000							
																			1420	1200							
BNF 2806-5	28	6	28.75	25.2	2×2.5	17.5	49.4	55	85	68	12	56	69	6.6	11	6.5	M6	A	520	300	60	160	28	20.3	1.13	3.89	2430
																			620	400							
																			720	500							
																			920	700							
																			1020	800							
																		1220	1000								
																		1420	1200								
																		B	720	400	70	250	28	24.8			
																			920	500							
																			1100	700							
730	500																										
930	700																										
BNF 3205-5	32	5	32.75	29.2	2×2.5	18.5	56.4	58	85	56	12	44	71	6.6	11	6.5	M6	A	730	500	70	160	32	25.3	0.93	5.03	2130
																			930	700							
																			1230	1000							
																			1430	1200							
																			1630	1400							
																			1830	1600							

## 呼び形番の構成例

**BNF2806-10 RR G1 +1020L C5 A**

呼び形番

軸方向すきま  
記号

精度記号

軸端末未加工品記号(AまたはB)

防塵用部品記号    ねじ軸全長(mm表示)

注)防塵用部品はラビリンスシールが標準仕様です。■15-376参照

軸方向すきまは■15-19参照。

精度記号は■15-12参照。