
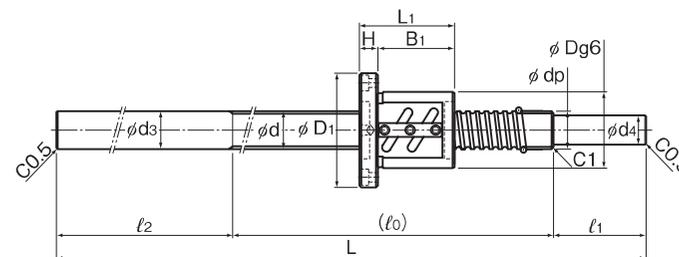


BNF形(軸端末未加工品) 無予圧タイプ

DN値 70000



単位:mm

呼び形番	ボールねじ仕様							ナット寸法				ねじ軸寸法										ナット質量 kg	軸質量 kg/m	許容回転数 min ⁻¹																													
	ねじ軸外径 d	リード Ph	ボール中心径 dp	谷径 dc	負荷回路数 列×巻	基本定格荷重 Ca kN	Coa kN	外径 D	フランジ径 D1	全長 L1	H	B1	PCD	d1	d2	h	給脂穴 A	軸端末未加工記号	全長 L	l0	l1				l2	d3	d4																										
BNF 3206-5	32	6	33	28.4	2×2.5	25.2	70.4	62	89	63	12	51	75	6.6	11	6.5	M6	A	730	500	70	160	32	25.3	1.2	4.63	2120																										
																			930	700																																	
																			1230	1000																																	
																			1430	1200																																	
																			1630	1400																																	
																			1830	1600																																	
BNF 3210A-5	32	10	33.75	26.4	2×2.5	47.2	112.7	74	108	100	15	85	90	9	14	8.5	M6	A	730	500	70	160	32	25.3	2.8	3.66	2070																										
																			930	700																																	
																			1430	1200																																	
BNF 3610-5	36	10	37.75	30.5	2×2.5	50.1	126.4	75	120	111	18	93	98	11	17.5	11	M6	A	730	500	70	160	36	30.3	3.4	5.03	1850																										
																			930	700																																	
																			1430	1200																																	
																			1830	1600																																	
																			BNF 3610-5	36								10	37.75	30.5	2×2.5	50.1	126.4	75	120	111	18	93	98	11	17.5	11	M6	B	930	500	100	330	36	30.3	3.4	5.03	1850
																																													1100	700							
1830	1200																																																				

呼び形番の構成例

BNF3206-10 RR G1 +1100L C5 B

呼び形番

軸方向すきま
記号

精度記号

軸端末未加工品記号(AまたはB)

防塵用部品記号 ねじ軸全長 (mm表示)

注)防塵用部品はラビリンスシールが標準仕様です。■15-376参照

軸方向すきまは■15-19参照。

精度記号は■15-12参照。