



転造ボールねじ
無予圧タイプ



ねじ軸 外径	18~30
リード	5~60

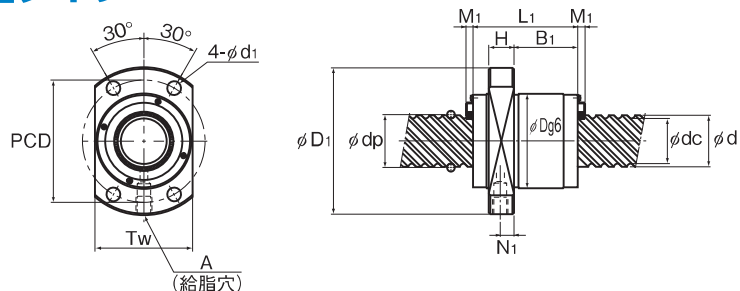


WHF2020,2525/BLK

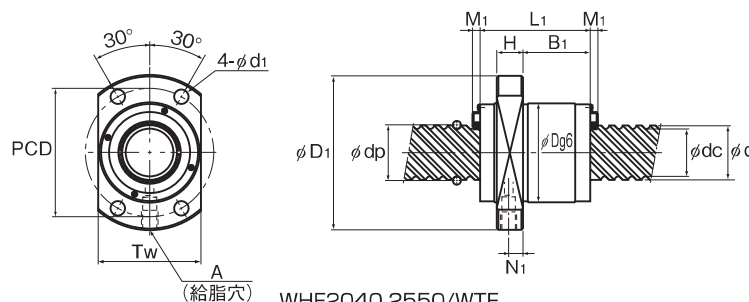

WHF2040,2550/WTF

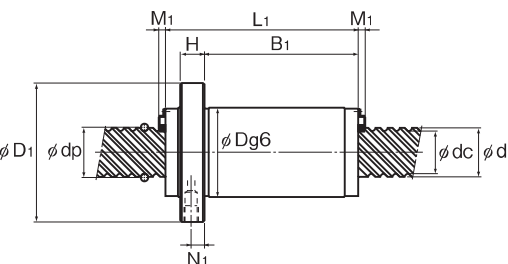

CNF



BTK 1404~5016形

単位:mm

ねじ軸 外 径 d	リード Ph	呼び形番	ボール 中心径 dp	谷径 dc	負 荷 回路数 列×巻	基本定格荷重		剛性 K N/μm	ナット寸法		給脂穴			シール	軸方向 すきま	標準軸長	ねじ軸 慣性モーメント/mm ³ kg・cm ² /mm	ナット 質 量 kg	軸 質量 kg/m					
						Ca kN	Coa kN		外径 D	フランジ径 D ₁	全長 L ₁	H	B ₁							PCD	d ₁	T _w	N ₁	A
18	8	BTK 1808-3.6	19.3	14.4	1×3.65	13.1	31	210	50	80	61	12	49	65	6.6	60	5	M6	—	0.1	500, 1000	8.09×10 ⁻⁴	0.98	1.71
	5	BTK 2005-2.6	20.5	17.2	1×2.65	6	16.5	150	40	60	40	10	30	50	4.5	46	5	M6	—	0.1		1.23×10 ⁻³	0.35	2.15
	10	BTK 2010-2.6	21.25	16.4	1×2.65	10.6	25.1	160	52	82	61	12	49	67	6.6	64	5	M6	—	0.1		1.23×10 ⁻³	1.08	2.16
	20	WHF 2020-3.4	20.75	17.5	2×1.7	6.6	18.9	225	42	64	47.1	10	24.1	53	5.5	46	5	M6	3.5	0.1		1.23×10 ⁻³	0.49	2.25
		BLK 2020-3.6	20.75	17.5	2×1.8	7.7	22.3	210	39	62	45	10	27.5	50	5.5	46	5	M6	3.5	0.1		1.23×10 ⁻³	0.35	2.18
		BLK 2020-7.2	20.75	17.5	4×1.8	13.9	44.6	410	39	62	45	10	27.5	50	5.5	46	5	M6	3.5	0.1		1.23×10 ⁻³	0.35	2.18
		WTF 2040-2	20.75	17.5	4×0.65	5.4	13.6	160	37	57	41.5	10	25.5	47	5.5	38	5.5	M6	3.5	0.1		1.23×10 ⁻³	0.25	2.12
	40	WTF 2040-3	20.75	17.5	2×1.65	6.6	17.2	200	37	57	81.5	10	65.5	47	5.5	38	5.5	M6	3.5	0.1		1.23×10 ⁻³	0.5	2.12
		WHF 2040-3.4	20.75	17.5	2×1.7	6.6	17.2	256	37	62	82.7	10	65.7	50	5.5	46	5	M6	3.5	0.1		1.23×10 ⁻³	0.58	2.34
		CNF 2040-6	20.75	17.5	4×1.65	12	34.4	400	37	57	81	10	65	47	5.5	—	5.5	M6	3.5	0.1		1.23×10 ⁻³	0.5	2.12
25		5	BTK 2505-2.6	25.5	22.2	1×2.65	6.7	20.8	180	43	67	40	10	30	55	5.5	50	5	M6	—	0.1	500, 1000, 1500	3.01×10 ⁻³	0.37
	10	BTK 2510-5.3	26.8	20.2	2×2.65	31.2	83.7	400	60	96	98	15	83	78	9	72	5	M6	—	0.1	3.01×10 ⁻³		2.06	3.26
	25	WHF 2525-3.4	26	21.9	2×1.7	10.5	29.9	285	50	77	58.8	12	31.3	63	6.6	56	6	M6	3.5	0.1	3.01×10 ⁻³		0.65	3.52
		BLK 2525-3.6	26	21.9	2×1.8	12.1	35	270	47	74	55	12	35	60	6.6	56	6	M6	3.5	0.1	3.01×10 ⁻³		0.64	3.41
		BLK 2525-7.2	26	21.9	4×1.8	21.9	69.9	520	47	74	55	12	35	60	6.6	56	6	M6	3.5	0.1	3.01×10 ⁻³		0.64	3.41
		WTF 2550-2	26	21.9	4×0.65	8.5	21.2	200	45	69	52	12	31.5	67	6.6	46	7	M6	3.5	0.1	3.01×10 ⁻³		0.45	3.34
	50	WTF 2550-3	26	21.9	2×1.65	10.4	26.9	260	45	69	102	12	81.5	57	6.6	46	7	M6	3.5	0.1	3.01×10 ⁻³		0.85	3.34
		WHF 2550-3.4	26	21.9	2×1.7	10.4	27.1	323	45	69	103.3	12	79.3	57	6.6	46	6	M6	3.5	0.1	3.01×10 ⁻³		0.72	3.66
		CNF 2550-6	26	21.9	4×1.65	18.9	53.9	460	45	69	102	12	81.5	57	6.6	—	7	M6	3.5	0.1	3.01×10 ⁻³		0.85	3.34
		28	6	BTK 2806-2.6	28.5	25.2	1×2.65	7	23.4	200	50	80	47	12	35	65	6.6	60	6	M6	—		0.1	500, 1000, 2000, 2500
BTK 2806-5.3	28.5			25.2	2×2.65	12.8	46.8	390	50	80	65	12	53	65	6.6	60	6	M6	—	0.1	4.74×10 ⁻³	0.84	4.44	
WTF 3060-2	31.25			26.4	4×0.65	11.8	30.6	240	55	89	62.5	15	37.5	71	9	56	9	M6	3.8	0.14	6.24×10 ⁻³	0.8	4.84	
WTF 3060-3	31.25			26.4	2×1.65	14.5	38.9	310	55	89	122.5	15	97.5	71	9	56	9	M6	3.8	0.14	6.24×10 ⁻³	1.7	4.84	
30	60	CNF 3060-6	31.25	26.4	4×1.65	26.2	77.7	600	55	89	122	15	97	71	9	—	9	M6	3.8	0.14	6.24×10 ⁻³	1.7	4.84	

注) WHF形は受注対応品です。ご採用に関してはTHKにお問い合わせください。