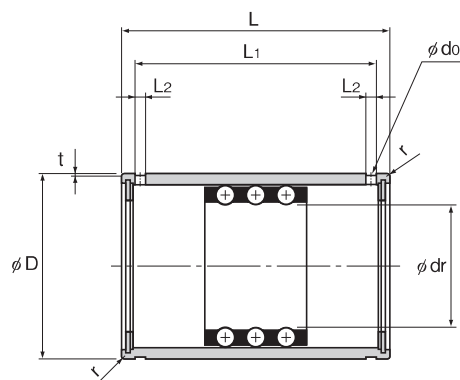
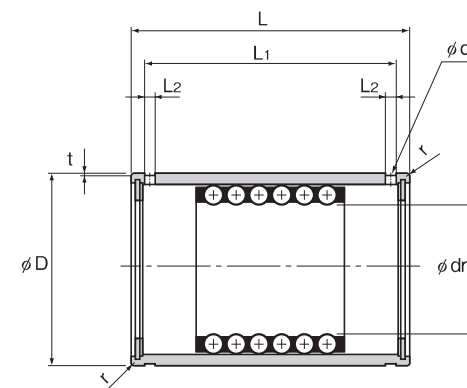


ST形、ST-B形

ST形
(軽荷重用)ST-B形
(中荷重用)

単位:mm

呼び形番	最大ストローク														基本動 定格荷重 C kN	基本静 定格荷重 C ₀ kN	質量 g
		内接円径		外径			長さ		L ₁	L ₂	t	d ₀	r				
		dr	許容差	D	許容差		L	許容差									
ST 6	14	6	+0.018 +0.010	12	0 -0.008	19	0 -0.2	13.5	1.1	0.25	—	0.3	0.98	0.23	8		
ST 8 ST 8B	24 8	8	+0.022 +0.013	15		24		20.1	1.5	0.5	1.5	0.5	0.98 2.06	0.27 0.55	16.4 17.6		
ST 10 ST 10B	30 8	10		19	30	25.7		1.5	0.5	1.5	0.5	2.35 4.61	0.62 1.27	31.5 34.5			
ST 12 ST 12B	32 8	12	+0.027 +0.016	23	32	27.5		1.5	0.5	1.5	0.5	4.02 8.14	1.08 2.25	47 53.5			
ST 16 ST 16B	40 16	16		28	37	32.1		1.5	0.5	1.5	0.5	4.02 8.04	1.27 2.65	77 85			
ST 20 ST 20B	54 28	20	+0.033 +0.020	32	45	0 -0.3	39.8	2	0.5	2	0.5	4.12 8.33	1.57 3.24	109 120			
ST 25 ST 25B	54 28	25		37	45		39.8	2	0.5	2	1	4.12 8.14	1.76 3.63	128 142			
ST 30 ST 30B	82 44	30		45	65		58.5	2.5	0.5	2.5	1	9.31 18.7	4.12 8.14	240 275			
ST 35 ST 35B	92 54	35	+0.041 +0.025	52	0 -0.013	70	63.5	2.5	0.7	2.5	1.5	9.41 18.7	4.51 9.02	370 410			

LMストローク