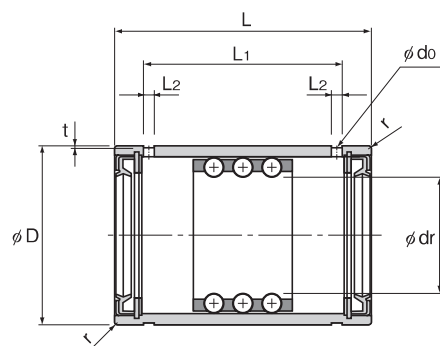
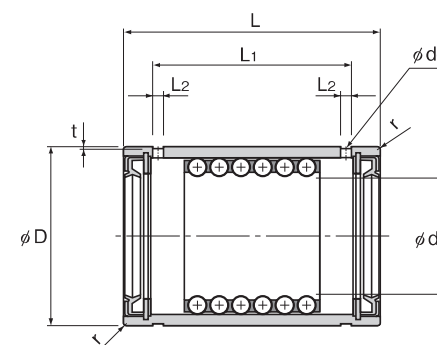


ST…UU形、ST…UUB形

ST…UU形
(軽荷重用)ST…UUB形
(中荷重用)

単位:mm

呼び形番	最大ストローク														基本動 定格荷重	基本静 定格荷重	質量
		内接円径		外径			長さ		L ₁	L ₂	t	d ₀	r				
		dr	許容差	D	許容差		L	許容差									
ST 8UU	14	8	+0.022 +0.013	15	0 −0.008	24	0 −0.2	15.3	1.5	0.5	1.5	0.5	0.98	0.27	17		
ST 10UU	16	10		19	0 −0.009	30		18.5	1.5	0.5	1.5	0.5	2.35	0.62	31		
ST 12UU	17	12	+0.027 +0.016	23		32		20.1	1.5	0.5	1.5	0.5	4.02	1.08	49		
ST 16UU	24	16		28		37		24.1	1.5	0.5	1.5	0.5	4.02	1.27	80		
ST 20UU ST 20UUB	32 12	20	+0.033 +0.020	32	0 −0.011	45	0 −0.3	30.8	2	0.5	2	0.5	4.12 8.33	1.57 3.24	112 125		
ST 25UU ST 25UUB	32 12	25		37		45		30.8	2	0.5	2	1	4.12 8.14	1.76 3.63	132 145		
ST 30UU ST 30UUB	65 27	30		45		65		50.1	2.5	0.5	2.5	1	9.31 18.7	4.12 8.14	245 280		
ST 35UU ST 35UUB	75 37	35	+0.041 +0.025	52	0 −0.013	70		55.1	2.5	0.7	2.5	1.5	9.41 18.7	4.51 9.02	375 420		
ST 40UU ST 40UUB	91 49	40		60		80		64.9	2.5	0.7	2.5	1.5	12.5 25	6.18 12.4	580 640		
ST 45UU ST 45UUB	91 49	45		65		80		64.9	2.5	0.7	2.5	1.5	12.6 25.2	6.76 13.5	635 705		