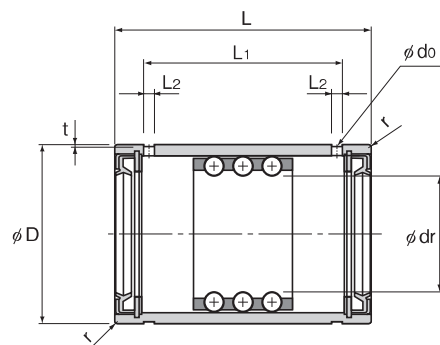
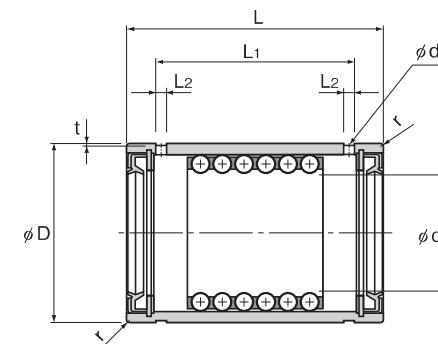


ST...UU形、ST...UUB形

ST...UU形
(軽荷重用)ST...UUB形
(中荷重用)

単位:mm

呼び形番	最大ストローク															基本動 定格荷重 C kN	基本静 定格荷重 C ₀ kN	質量 g
		内接円径		外径			長さ		L ₁	L ₂	t	d ₀	r					
		dr	許容差	D	許容差		L	許容差										
ST 50UU ST 50UUB	120 70	50	+0.041 +0.025	72	0 −0.013		100	0 −0.3	83.4	3	1	3	1.5	16.3 32.5	8.82 17.7	920 1030		
ST 55UU ST 55UUB	120 70	55	+0.049 +0.030	80			100		83.4	3	1	3	2	16.6 33	9.71 19.3	1280 1400		
ST 60UU ST 60UUB	120 70	60		85		100	83.4		3	1	3	2	16.8 33.6	10.5 21	1370 1490			
ST 70UU ST 70UUB	120 70	70		95		100	83.4	3	1	3	2	16.9 33.8	11.7 23.3	1540 1680				
ST 80UU ST 80UUB	114 58	80		110		100	83	3	1.5	3	2	21.3 42.5	15.3 30.6	2240 2450				
ST 90UU ST 90UUB	114 58	90	+0.058 +0.036	120	0 −0.015		100	0 −0.4	83	3	1.5	3	2	21.7 43.3	16.9 33.7	2470 2700		
ST 100UU ST 100UUB	114 58	100		130			100		83	3	1.5	3	2	22 43.9	18.3 36.8	2700 2940		

LMストローク