

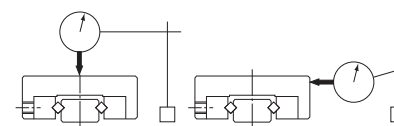
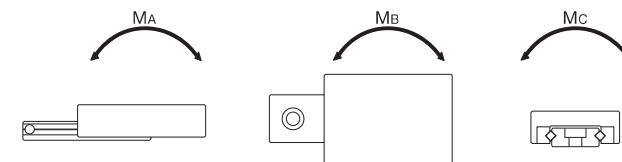


## VRT-A形 ミニチュアタイプ(ベース取付穴タイプ)

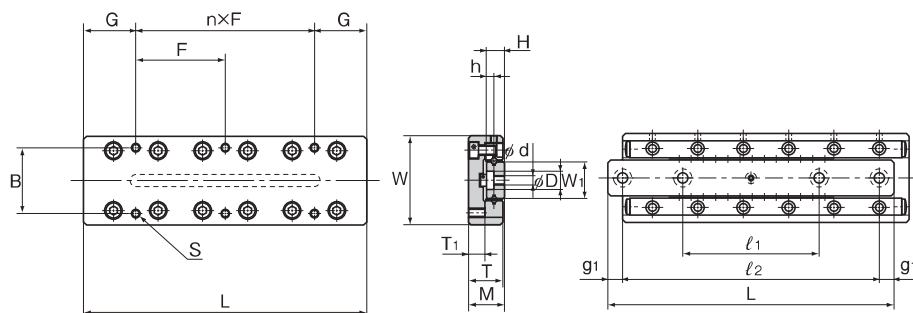

精度:ΔC

精度:ΔD



単位:mm

呼び形番	主要寸法					テーブル面寸法				側面寸法				ベース面寸法 取付穴位置				基本定格荷重			静的許容モーメント			精度μm	
	最大 ストローク	幅 W ±0.1	高さ M ±0.1	長さ L	質量 g	テーブル取付タップ位置				T	T <sub>1</sub>	H	W <sub>1</sub>	d×D×h	l <sub>1</sub>	l <sub>2</sub>	g <sub>1</sub>	ローラー数 Z	C kN	C <sub>0</sub> kN	M <sub>A</sub> N·m	M <sub>B</sub> N·m	M <sub>C</sub> N·m	ΔC	ΔD
						B	n×F	G	S																
VRT 1025A	12	20	8	25	23	14	1×18	3.5	M2.6	7.5	3.5	4	6.7	2.5×4.1×2.2	—	18	3.5	5	0.46	0.61	1.52	1.25	2.29	4	—
VRT 1035A	18			35	32		1×28	3.5							—	25	5	7	0.63	0.92	2.62	2.32	3.44		
VRT 1045A	25			45	42		1×20	12.5							25	38	3.5	10	0.95	1.53	4.14	4.53	5.73		
VRT 1055A	32			55	52		1×30	12.5							29	48	3.5	12	1.09	1.83	5.92	6.41	6.87		
VRT 1065A	40			65	62		2×20	12.5							31	55	5	14	1.23	2.14	8.08	8.62	8.02		
VRT 1075A	45			75	72		1×30	22.5							35	65	5	18	1.5	2.75	13.3	14	10.3		
VRT 1085A	50			85	82		2×30	12.5							40	75	5	20	1.63	3.05	16.4	17.2	11.5		
VRT 2035A	18	30	12	35	78	22	1×28	3.5	M3	11.5	5.5	6	12.2	3.5×6×3.2	—	25	5	5	0.84	1.09	4.32	3.55	7.06	2	4
VRT 2050A	30			50	113		1×43	3.5							—	35	7.5	7	1.16	1.63	7.45	6.59	10.6		
VRT 2065A	40			65	147		1×30	17.5							33	55	5	9	1.46	2.17	11.8	10.5	14.1		
VRT 2080A	50			80	181		1×45	17.5							40	70	5	12	2.01	3.26	16.8	18.2	21.2		
VRT 2095A	60			95	217		2×30	17.5							45	85	5	14	2.26	3.8	23	24.5	24.7		
VRT 2110A	70			110	254		1×45	32.5							50	95	7.5	17	2.51	4.34	37.9	35.7	28.2		
VRT 2125A	80			125	287		2×45	17.5							55	110	7.5	19	2.76	4.89	46.7	44.3	31.8		
VRT 3055A	30	40	16	55	226	30	1×40	7.5	M4	15.5	7.5	8	16	4.5×7.5×4.2	—	40	7.5	6	2.71	3.67	12.2	13.9	31.9	3	6
VRT 3080A	45			80	333		1×65	7.5							43	68	6	10	4.06	6.11	33.1	36.2	53.1		
VRT 3105A	60			105	439		1×50	27.5							55	90	—	13	4.68	7.33	64.6	59.8	63.8		
VRT 3130A	75			130	548		1×75	27.5							65	115	7.5	17	5.87	9.77	107	100	85		
VRT 3155A	90			155	652		2×50	27.5							95	140		20	6.98	12.2	131	138	106		
VRT 3180A	105			180	761		1×75	52.5							85	165		24	8.05	14.7	189	196	128		
VRT 3205A	130			205	866		2×75	27.5							90	190		26	8.57	15.9	222	230	138		

注)耐食性に優れたオールステンレス鋼製も製作します。

(例)VRT 2035A M  
└── ステンレス鋼製記号