

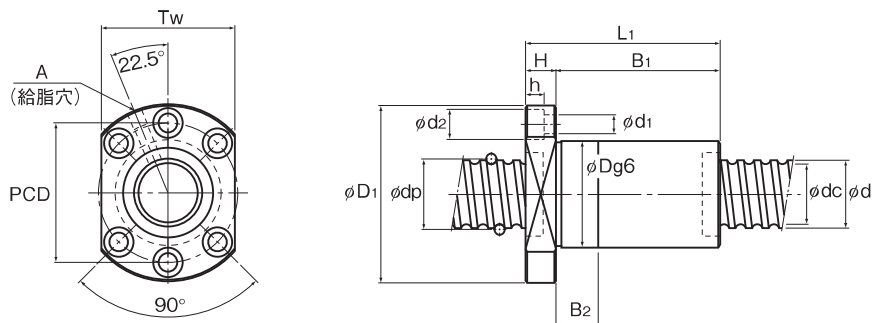


精密ボールねじ
予圧タイプ



ねじ軸 外径	32
リード	4~6

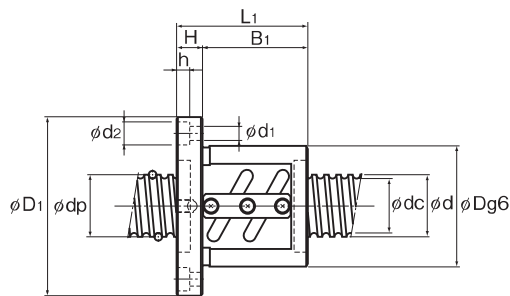

DIK (2805~6312)



BIF

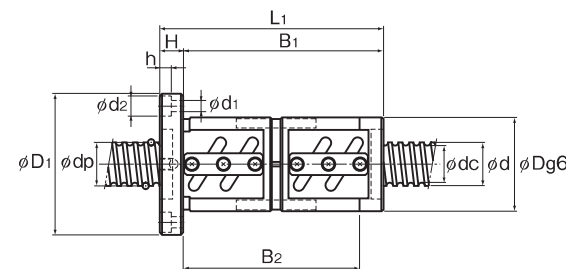

BNFN

ねじ軸 外 径 d	リード Ph	呼び形番	ボール 中心径 dp	谷径 dc	負 荷 回路数 列×巻	基本定格荷重		剛性 K N/μm	ナット寸法										ねじ軸 慣性モーメント/mm kg・cm ² /mm	ナット 質 量 kg	軸 質量 kg/m
						Ca kN	C _{0a} kN		外径 D	フランジ径 D ₁	全長 L ₁	H	B ₁	B ₂	PCD	d ₁ ×d ₂ ×h	Tw	給脂穴 A			
32	4	BIF 3204-10	32.5	30.1	2×2.5	10.5	35.4	1010	54	81	76	11	65	—	67	6.6×11×6.5	—	M6	8.08×10 ⁻³	0.97	5.86
		DIK 3204-6	32.5	30.1	3×1	6.4	19.6	580	45	76	64	11	53	15	63	6.6×11×6.5	59	M6	8.08×10 ⁻³	0.57	5.86
		DIK 3204-8	32.5	30.1	4×1	8.2	26.1	760	45	76	72	11	61	15	63	6.6×11×6.5	59	M6	8.08×10 ⁻³	0.62	5.86
		DIK 3204-10	32.5	30.1	5×1	10	32.7	940	45	76	80	11	69	20	63	6.6×11×6.5	59	M6	8.08×10 ⁻³	0.66	5.86
	5	DIK 3205-6	32.75	29.2	3×1	11.1	30.2	620	46	76	62	12	50	10	63	6.6×11×6.5	59	M6	8.08×10 ⁻³	0.60	5.67
		DIK 3205-8	32.75	29.2	4×1	14.2	40.3	810	46	76	73	12	61	15	63	6.6×11×6.5	59	M6	8.08×10 ⁻³	0.67	5.67
		○ BIF 3205-5	32.75	29.2	1×2.5	10.2	28.1	570	58	85	56	12	44	—	71	6.6×11×6.5	—	M6	8.08×10 ⁻³	0.94	5.67
		○ BIF 3205-10	32.75	29.2	2×2.5	18.5	56.4	1110	58	85	86	12	74	—	71	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.31	5.67
		○ BNFN 3205-2.5	32.75	29.2	1×2.5	10.2	28.1	570	58	85	76	12	64	51	71	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.19	5.67
		○ BNFN 3205-3	32.75	29.2	2×1.5	12	33.8	690	58	85	103	12	91	78	71	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.52	5.67
		○ BNFN 3205-4.5	32.75	29.2	3×1.5	17	50.7	1000	58	85	123	12	111	98	71	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.77	5.67
		○ BNFN 3205-5	32.75	29.2	2×2.5	18.5	56.4	1110	58	85	106	12	94	81	71	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.56	5.67
		○ BNFN 3205-7.5	32.75	29.2	3×2.5	26.3	84.5	1640	58	85	136	12	124	111	71	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.93	5.67
	6	DIK 3206-6	33	28.4	3×1	14.9	37.1	630	48	76	73	12	61	15	63	6.6×11×6.5	59	M6	8.08×10 ⁻³	0.74	6.31
		DIK 3206-8	33	28.4	4×1	19.1	49.5	820	48	76	87	12	75	20	63	6.6×11×6.5	59	M6	8.08×10 ⁻³	0.85	6.31
		○ BIF 3206-5	33	28.4	1×2.5	13.9	35.2	600	62	89	63	12	51	—	75	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.21	6.31
		○ BIF 3206-7	33	28.4	1×3.5	18.5	49.2	810	62	89	75	12	63	—	75	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.39	6.31
		○ BIF 3206-10	33	28.4	2×2.5	25.2	70.4	1150	62	89	99	12	87	—	75	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.75	6.31
		○ BNFN 3206-2.5	33	28.4	1×2.5	13.9	35.2	600	62	89	87	12	75	62	75	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.57	6.31
		○ BNFN 3206-3	33	28.4	2×1.5	16.3	42.2	710	62	89	111	12	99	86	75	6.6×11×6.5	—	M6	8.08×10 ⁻³	1.93	6.31
		○ BNFN 3206-5	33	28.4	2×2.5	25.2	70.4	1150	62	89	123	12	111	98	75	6.6×11×6.5	—	M6	8.08×10 ⁻³	2.11	6.31

注) 呼び形番の薄字は標準品を示します。ご採用に際してはTHKにお問い合わせください。

○は、潤滑装置QZ、ワイパーリングが装着可能です。

装着時のボールねじナット寸法は▲15-340をご参照ください。

呼び形番の構成については、▲15-232をご参照ください。